



Courtesy of: Pelican Events

LEADING DESIGNER AND MANUFACTURER OF MOBILE STAGES AND PROMOTIONAL UNITS



■ CONFIGURATION:

24' x 20' (7.32 M x 6.10 M)
40' x 24' (12.19 M x 7.32 M)
 WITH EXTENSION PLATFORMS

■ WIND RESISTANCE:



80 MPH (129 KM/H) WITHOUT WINDWALLS
60 MPH (97 KM/H) WITH WINDWALLS

■ SET UP TIME:

30 MINUTES (LESS WITHOUT WINDWALLS)
1 CERTIFIED TECHNICIAN
1 STAGEHAND

■ FULL HEIGHT RAINPROOF WINDWALLS ON 3 SIDES

■ CERTIFIED BY PROFESSIONAL ENGINEERS IN EVERY STATE AND PROVINCE




■ SPECIFICATIONS:

- **Load bearing capacity:** 6,500 lb (2,948 kg) no more
- **Roof lifting capacity:** 3,800 lb (1,725 kg)
- **Roof maximum height:** 14'-11" (4.55 m) from deck
- **Side overhang rigging beams:** For rigging sound
 - Capacity:** 800 lb at 36" (363 kg at 0.91 cm) per side
 - Height:** 19'-9" (6.02 m) from ground
- **Overall height from ground:** 24' (7.32 m) with banner
- **Floor:**
 - Size:** 24' x 20' (7.32 m x 6.10 m)
 - Capacity:** Rated at 100 lb/sq.ft (490 kg/m²)
 - Height:** 3'-6" to 4'-3" (1.07 m to 1.30 m)
- **Roof:** fiberglass bonded to 2" (50.8 mm) aluminum tubing
- **4 rigging points, trusses and rigging bar:** 2" tubing (50.8 mm)
- **1 stairway with handrails**
- **Storage capacity:** 5,000 lb (2,268 kg)

■ OPTIONAL

- **Stage option: "Mix Position" (SL100 Mix)**
- **Fire retardant windwalls on 3 sides:**
 - Vinyl or Mesh
 - Full color graphic printing
- **Skirting**
- **2 Front overhang extensions**
 - 9'-4" (2.85 m) - 125 lb at 34" each (57kg at 0.86 m)
- **Sound wing extensions:**
 - 8' x 8' (2.44 m x 2.44 m) with guardrails
- **Additional decks:**
 - up to 40' x 24' (12.19 m x 7.32 m)
 - with 4' x 8' (1.22 m x 2.44 m) extension platforms
- **1 Rooftop banner support:**
 - up to 37'-5" x 3'-11" (11.41 m x 1.20 m)
- **2 Lateral banner supports:**
 - up to 6' x 16' (1.83 m x 4.89 m)
- **Stage reversibility**
- **Publicity space:**
 - Rolling billboard to maximize visibility during transportation
 - Multiple banners of various sizes attach to structure for optimum visibility
- **Guardrails**
- **Sound wing covers**

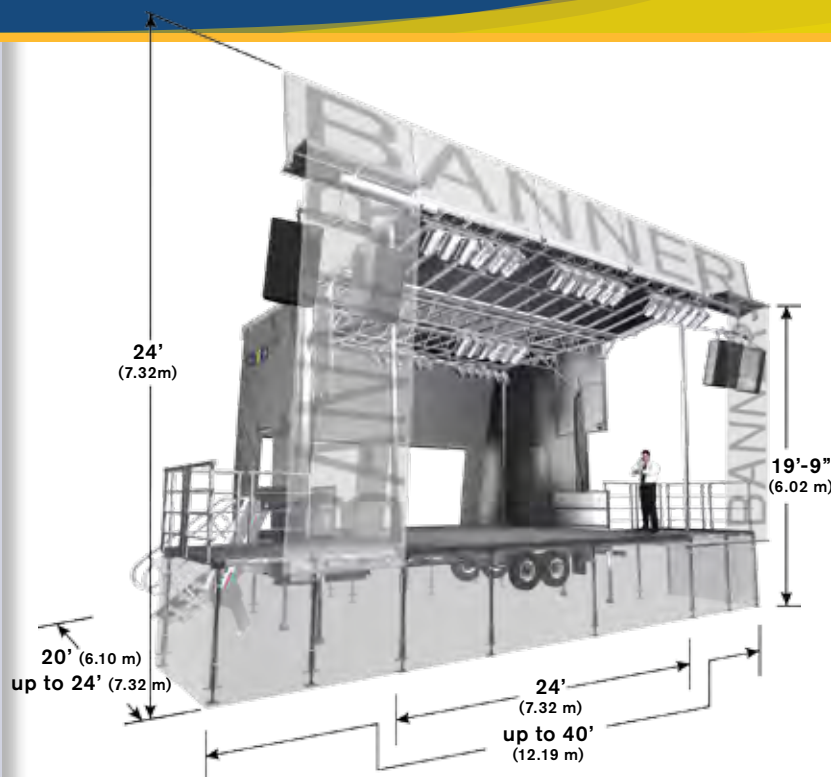

Set up Time:

1/2 hour 

Manpower:

2 x 

Why the industry chooses Stageline® products :

- **Manufacturing:** Stageline has built over 500 units.
- **Expertise:** Stageline has been designing mobile stages for over 25 years.
- **100% fail proof history:** Best safety record in the industry.
- **Reliability in engineering:** Highest wind resistance, with or without windwalls.
- **Wide range of models:** SL50, SL100, SL100-Mix, SL260, SL320, SAM555, Promobile, Covered wings & Backstage.
- **Rain or shine:** Complete rainproofing with full height windwalls and downstage canopies.
- **Single trailer:** All stage components travel in one stage trailer unit.
- **Quality:** Designed and built to last over 25 years. All units built to date are still in operation. Quality controlled with a 600-point inspection.
- **Standards:** All units are engineered to withstand 2 times the permitted load.

Tel: +1 450-589-1063

Fax: +1 450-589-1711

North America: 1 800-267-8243

www.stageline.com



Tough, safe and economical, STAGELINE mobile stages are built and field-tested by production professionals to meet the needs of your most demanding and varied outdoor projects. With over ten thousand successful events in more than 35 countries each year, these innovative products are considered by many to be the industry standard.



Due to Stageline's product improvement policy, technical specifications may change without notice.

